


## ML 4800

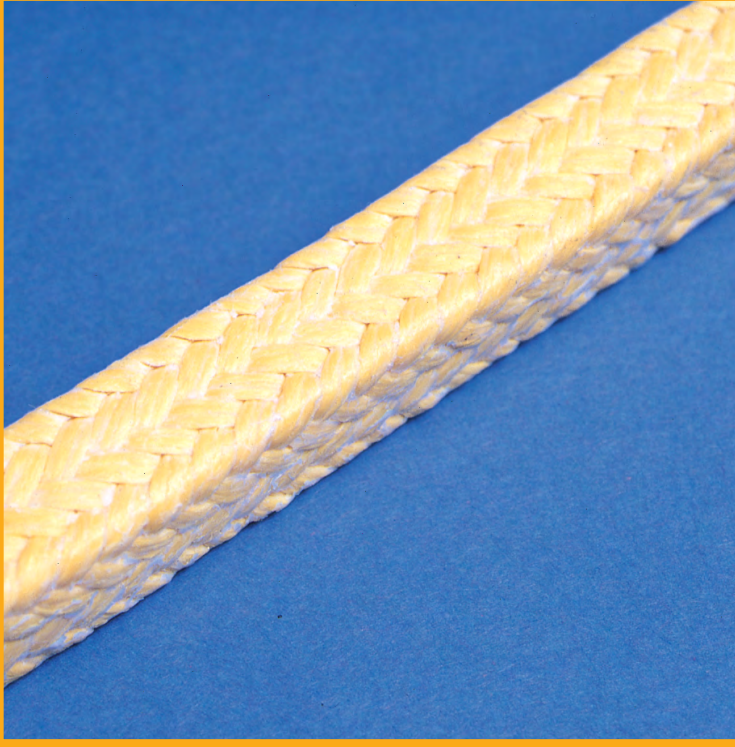

# ARAMID FILAMENT PACKING

### RECOMMENDED FOR

General service, caustics, mild acids, chemicals, air, oil gases, solvents, general chemical plant applications.

### SERVICE CONDITIONS

Shaft speeds to 1900 FPM; temperatures to 500°F/260 °C; pH range 3-11.

### EQUIPMENT

Rotating and reciprocating shafts. All equipment handling tough abrasive products.

### FEATURES

Non-asbestos aramid fiber.

### CONSTRUCTION

Multi-Lok Braid

### TREATMENT

Each strand is individually treated with a PTFE coating and a light, inert oil.

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.

Certified to ISO 9001: 2000 Standards.

Updated April 2013

*Quality Fluid Sealing Solutions for Industry.*